

15NA100

LF Drivers - 15.0 Inches

1600 W continuous program power capacity
100 mm (4 in) aluminium voice coil
45 - 2000 Hz response
98 dB sensitivity
FEA optimized Neodymium magnet assembly
Double silicone spider with optimized compliance
Ventilated voice coil gap for reduced power compression



Specifications

Nominal diameter	380 mm (15.0 in)
Nominal impedance	8 Ω
Minimum impedance	6.6 Ω
Nominal power handling ¹	800 W
Continuous power handling ²	1600 W
Sensitivity (1W/1m) ³	98.0 dB
Frequency range	45 - 2000 Hz
Voice coil diameter	100 mm (4.0 in)
Winding material	Aluminium
Former material	Glass Fibre
Winding depth	23 mm (0.9 in)
Magnetic gap depth	11 mm (0.43 in)
Flux density	1.2 T

Design

Surround shape	Triple Roll
Cone shape	Exponential
Magnet material	Neodymium Inside Slug

Design

Spider	Double Silicone
Pole design	T-Pole
Woofer cone treatment	WP Waterproof Front Side
Recommended enclosure	80.0 dm ³ (2.82 ft ³)
Recommended tuning	50 Hz

Parameters⁴

Fs	47 Hz
Re	5.1 Ω
Qes	0.29
Qms	6.1
Qts	0.28
Vas	88.0 dm ³ (3.1 ft ³)
Sd	855.0 cm ² (132.5 in ²)
η_0	2.9 %
Xmax	10.0 mm
Xvar	9.0 mm
Mms	136 g
Bl	26.3 Txm

Parameters

Le	1.2 mH
EBP	162 Hz

Mounting And Shipping Info

Overall diameter	393 mm (15.5 in)
Bolt circle diameter	374 mm (14.7 in)
Baffle cutout diameter	354.0 mm (13.9 in)
Depth	180 mm (7.09 in)
Flange and gasket thickness	16 mm (0.62 in)
Air volume occupied by driver	6.0 dm ³ (0.21 ft ³)
Net weight	9.3 kg (20.5 lb)
Shipping units	1
Shipping weight	10.8 kg (23.2 lb)
Shipping box	500x500x250 mm (19.7x19.7x9.8 in)


Service Kit

RCK15NA1008

1. 2 hours test made with continuous pink noise signal (6 dB crest factor) within the range Fs-10Fs. Power calculated on rated minimum impedance. Loudspeaker in free air.
2. Power on Continuous Program is defined as 3 dB greater than the Nominal rating.

3. Applied RMS Voltage is set to 2.83 V for 8 ohms Nominal Impedance.
4. Thiele-Small parameters are measured after a high level 20 Hz sine wave preconditioning test.

Frequency Response (2,83 Vrms/1 m)

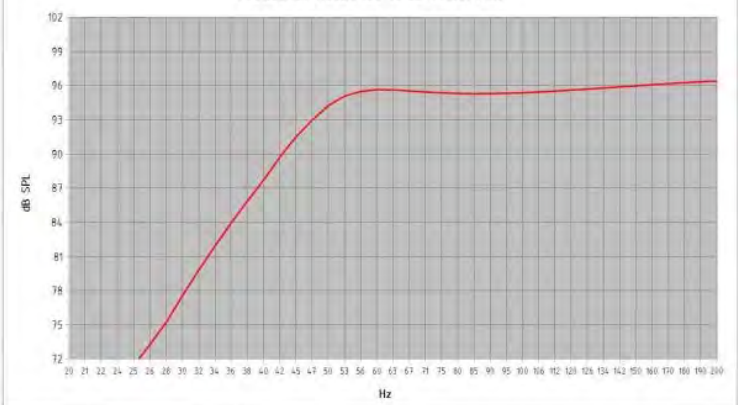

Model:	15 NA 100		
Enclosure Type:	Bass Reflex		
Internal Net Volume (Liters):	80	Port Area (cm ²):	222.3
Tuning Frequency (Hz):	50	Port Length (cm):	18.7
Frequency (-3 dB) (Hz):	50.1		
Excursion Limited Maximum SPL at 1 meter (dB):	123.9	equal to:	553.8 Watts (Bass Band Power Rating)
Thermal Limited Maximum SPL at 1 meter (dB):	125.4	equal to:	800.0 Watts (Mid Band Power Rating)



www.soundservice.gr